


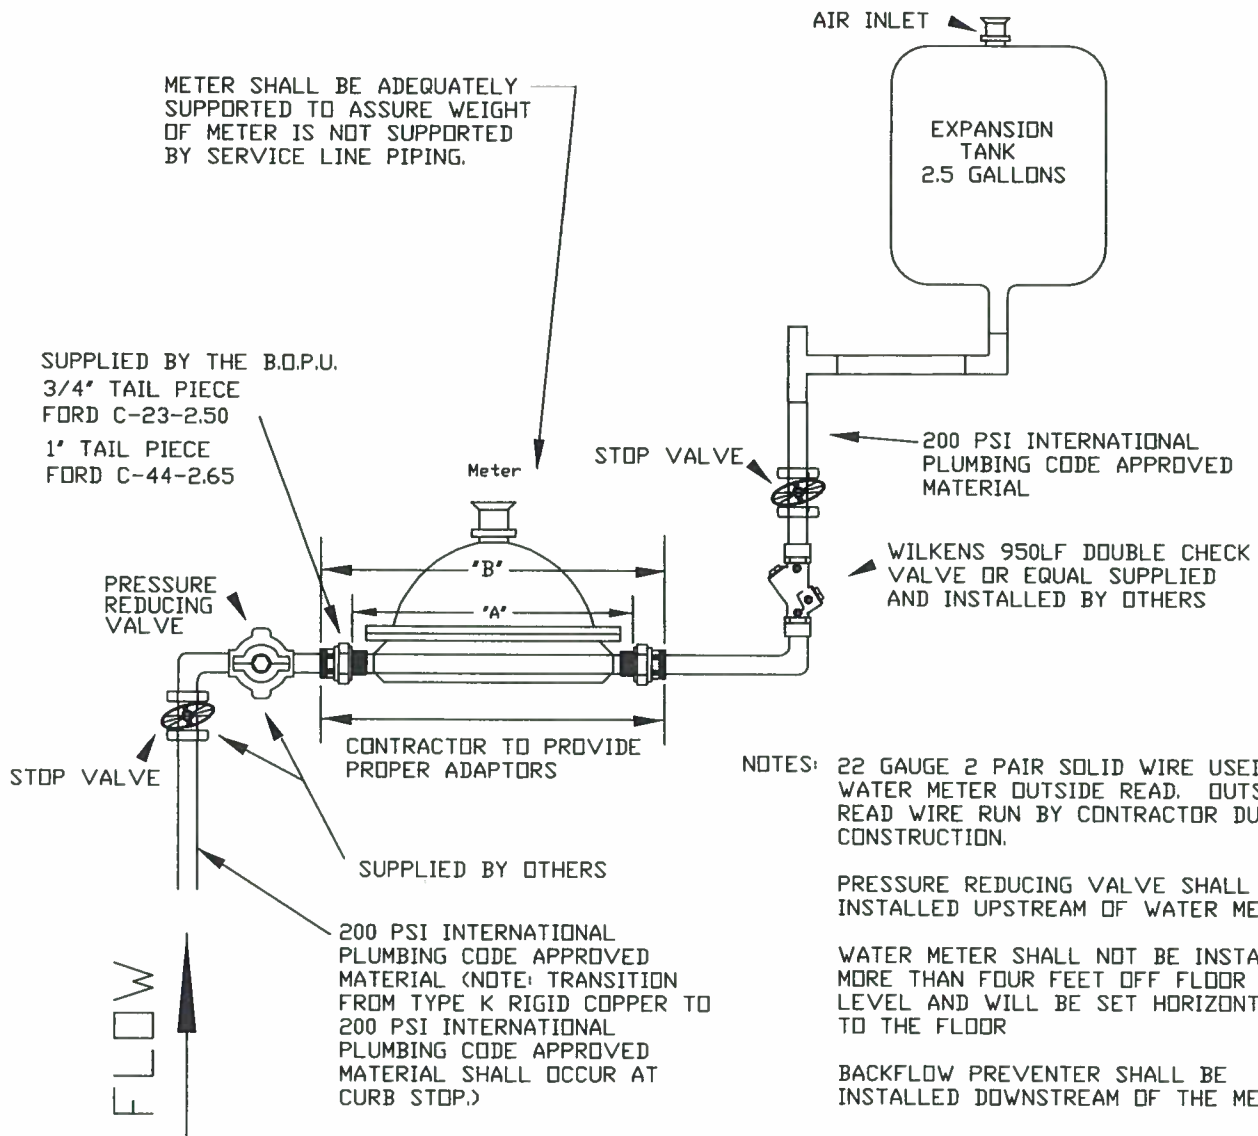

NOTES: 22 GAUGE 2 PAIR SOLID WIRE USED FOR WATER METER OUTSIDE READ. OUTSIDE READ WIRE RUN BY CONTRACTOR DURING CONSTRUCTION.

PRESSURE REDUCING VALVE SHALL BE INSTALLED UPSTREAM OF WATER METER.

WATER METER SHALL NOT BE INSTALLED MORE THAN FOUR FEET OFF FLOOR LEVEL AND WILL BE SET HORIZONTALLY TO THE FLOOR

BACKFLOW PREVENTER SHALL BE INSTALLED DOWNSTREAM OF THE METER

NO CONNECTIONS TO THE SERVICE SHALL BE PERMITTED UPSTREAM OF THE WATER METER.

WATER METER SET CLEARANCES:
FROM BACK: 6 INCHES;
FROM SIDES: 2 FEET;
FROM FRONT: 2 FEET.

APPROVED BOPU TRACER WIRE SHALL BE INSTALLED FROM THE CURB STOP TO THE HOUSE STOP VALVE. IF COPPER IS USED NO TRACER WIRE IS REQUIRED.

WARNING!


INSTALLATION OF A BACK FLOW PREVENTER REQUIRES INSTALLATION OF AN EXPANSION TANK IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

METER SIZE	"A"	"B"
3/4"	9"	13-3/4"
1"	11"	15-3/4"



CITY OF CHEYENNE
AND
BOARD OF PUBLIC
UTILITIES
STANDARD DRAWING


INSIDE INSTALLATION
DETAIL FOR 3/4" AND 1"
WATER METER



REVISED
2014

STANDARD
DRAWING NO.
02665-24

NOT TO SCALE

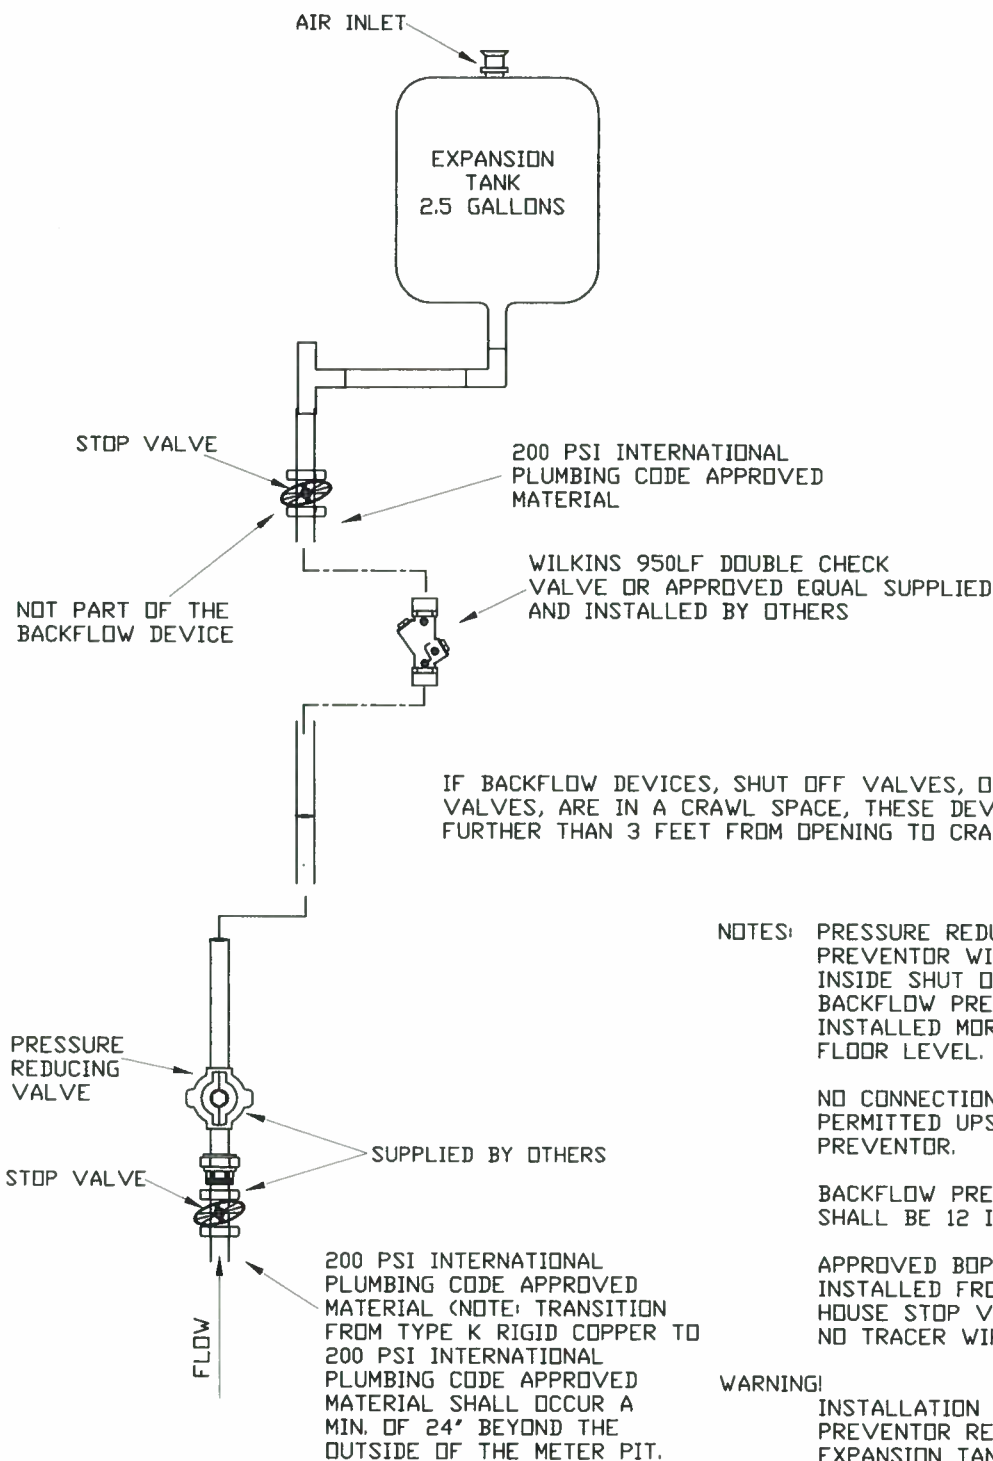

NOTES: PRESSURE REDUCING VALVE AND BACKFLOW PREVENTOR WILL BE INSTALLED AFTER INSIDE SHUT OFF VALVE. BACKFLOW PREVENTOR SHALL NOT BE INSTALLED MORE THAN FOUR FEET OFF FLOOR LEVEL.

NO CONNECTIONS TO THE SERVICE SHALL BE PERMITTED UPSTREAM OF THE BACKFLOW PREVENTOR.

BACKFLOW PREVENTOR SET CLEARANCE SHALL BE 12 INCHES ON ALL SIDES.

APPROVED BOPU TRACER WIRE SHALL BE INSTALLED FROM THE METER PIT TO THE HOUSE STOP VALVE. IF COPPER IS USED NO TRACER WIRE IS REQUIRED.


WARNING: INSTALLATION OF A BACK FLOW PREVENTOR REQUIRES INSTALLATION OF AN EXPANSION TANK IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

METER SIZE	WILKINS DOUBLE CHECK VALVE
3/4" & 1"	950LF OR EQUAL



CITY OF CHEYENNE
AND
BOARD OF PUBLIC
UTILITIES
STANDARD DRAWING

INSIDE INSTALLATION OF
BACKFLOW PREVENTER W/
OUTSIDE METER PIT FOR
3/4" AND 1" METER DETAILS



REVISED
2014

STANDARD
DRAWING NO.
02665-15